

# Technical data sheet

## Product features



### Steak grill electric double 65x48 table durable chrome

|              |                                  |                         |
|--------------|----------------------------------|-------------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00021114                |
| KD 63 E      | <b>A group of articles - web</b> | Grills and grill plates |



- Griddle dimensions [mm x mm]: 650 x 480 + 320 x 380
- Griddle thickness [mm]: 10.00
- Container for liquid fat: Yes
- Independent heating zones: Separate control for each heating zone on the bottom plate and for the top plates
- Maximum device temperature [°C]: 300
- Surface finish: durable chrome

|                        |          |                                     |                                         |
|------------------------|----------|-------------------------------------|-----------------------------------------|
| <b>SAP Code</b>        | 00021114 | <b>Net Weight [kg]</b>              | 60.00                                   |
| <b>Net Width [mm]</b>  | 710      | <b>Power electric [kW]</b>          | 9.000                                   |
| <b>Net Depth [mm]</b>  | 725      | <b>Loading</b>                      | 230 V / 1N - 50 Hz + 400 V / 3N - 50 Hz |
| <b>Net Height [mm]</b> | 540      | <b>Griddle dimensions [mm x mm]</b> | 650 x 480 + 320 x 380                   |




# Technical data sheet

Technical drawing



## Steak grill electric double 65x48 table durable chrome

|              |                                  |                         |
|--------------|----------------------------------|-------------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00021114                |
| KD 63 E      | <b>A group of articles - web</b> | Grills and grill plates |

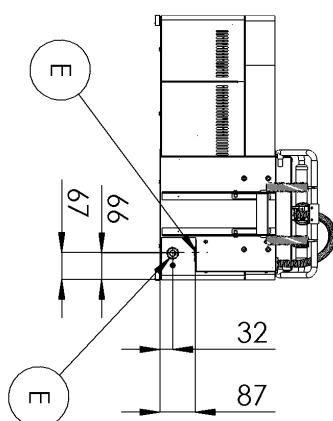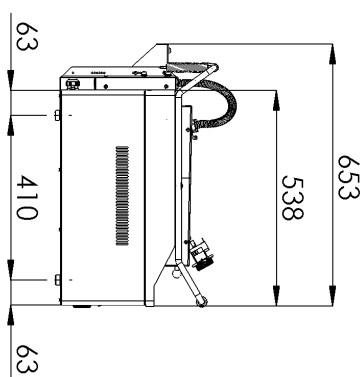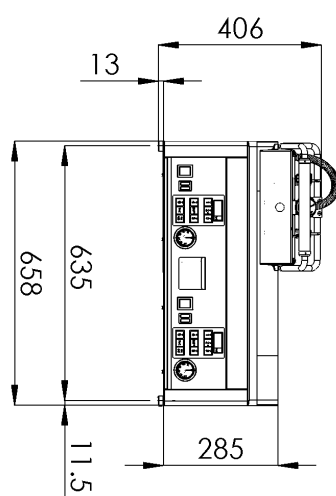

# Technical data sheet

## Product benefits



### Steak grill electric double 65x48 table durable chrome

|              |                                  |                         |
|--------------|----------------------------------|-------------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00021114                |
| KD 63 E      | <b>A group of articles - web</b> | Grills and grill plates |

1

#### **Nationheres**

Only stainless steel used for food contact

- Absolutely stainless steel and non -magnetic design resists even weaker acids easier to fill hygiene standards (HACCP); Simple maintenance and cleaning

2

#### **Chrome 0.03mm**

non -stick dishes when roasting easier to clean the board

- Faster and easier work to operate a higher quality of food

3

#### **Self -controlled control for upper and lower heating**

can i control both areas independent of each other

- Better adjustability and saving el. Energy more uniformly cooking I can prepare more types of meals and faster on one device

4

#### **Upper contact area with Teflon canvas**

non -backed rollers  
uniform warming the rolls

- faster and easier work for service
- faster preparation
- maintaining the shape of food
- faster closed surface of food from both sides of more juicy meat

# Technical data sheet

## Technical parameters



### Steak grill electric double 65x48 table durable chrome

|              |                                  |                         |
|--------------|----------------------------------|-------------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00021114                |
| KD 63 E      | <b>A group of articles - web</b> | Grills and grill plates |

**1. SAP Code:**

00021114

**2. Net Width [mm]:**

710

**3. Net Depth [mm]:**

725

**4. Net Height [mm]:**

540

**5. Net Weight [kg]:**

60.00

**6. Gross Width [mm]:**

725

**7. Gross depth [mm]:**

710

**8. Gross Height [mm]:**

540

**9. Gross Weight [kg]:**

65.00

**10. Device type:**

Electric unit

**11. Construction type of device:**

Table top

**12. Power electric [kW]:**

9.000

**13. Loading:**

230 V / 1N - 50 Hz + 400 V / 3N - 50 Hz

**14. Protection of controls:**

IPX4

**15. Material:**

AISI 430

**16. Indicators:**

operation and warm-up

**17. Surface finish:**

durable chrome

**18. Maximum device temperature [°C]:**

300

**19. Minimum device temperature [°C]:**

50

**20. Griddle dimensions [mm x mm]:**

650 x 480 + 320 x 380

**21. Griddle thickness [mm]:**

10.00

**22. Container for liquid fat:**

Yes

**23. Independent heating zones:**

Separate control for each heating zone on the bottom plate and for the top plates

**24. Uniform heating:**

Yes

**25. Cross-section of conductors CU [mm²]:**

4