

Product features

| Electric fryer 0,56 kW/l, 16 l on cabinet 400 V | | |
|---|------------------------------|---------------------------------|
| Model | SAP Code | 00007381 |
| FE 66 ELT | A group of articles - web | Fryers and French Fries Holders |




- Basin volume [l]: 16
- Drain type: On the front panel
- Drain: Yes
- Maximum device temperature [°C]: 190
- Minimum device temperature [°C]: 50
- Material: Stainless steel
- Heating location: Inside the tank
- Ignition: Electric
- Number of baskets: 1
- Basket size [mm]: 455 x 245 x 80

| SAP Code | 00007381 | Power electric [kW] | 9.000 |
|-----------------|----------|---------------------|--------------------|
| Net Width [mm] | 658 | Loading | 400 V / 3N - 50 Hz |
| Net Depth [mm] | 609 | Basin volume [l] | 16 |
| Net Height [mm] | 290 | Number of baskets | 1 |
| Net Weight [kg] | 15.00 | Basket size [mm] | 455 x 245 x 80 |



Technical drawing

| Electric fryer 0,56 kW/l, 16 l on cabinet 400 V | | |
|---|---------------------------|---------------------------------|
| Model | SAP Code | 00007381 |
| FE 66 ELT | A group of articles - web | Fryers and French Fries Holders |

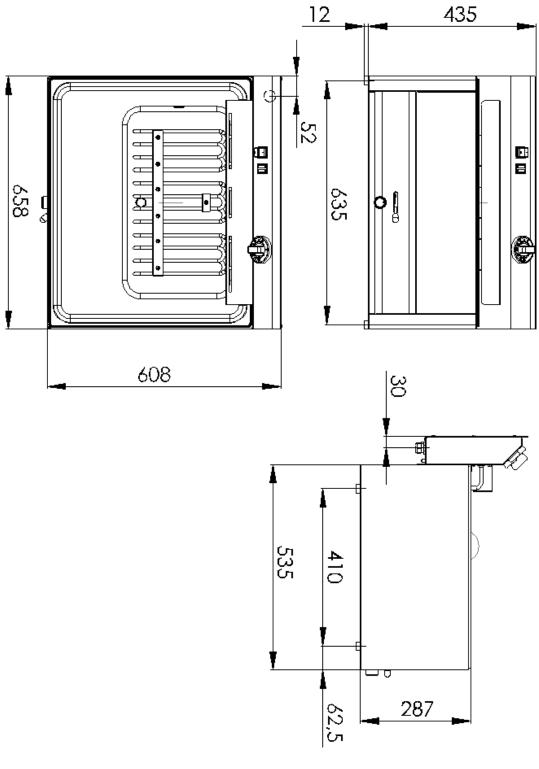



Product benefits

| Electric fryer 0,56 kW/l, 16 l on cabinet 400 V | | |
|---|---------------------------|---------------------------------|
| Model | SAP Code | 00007381 |
| FE 66 ELT | A group of articles - web | Fryers and French Fries Holders |

All-stainless steel bathtub

long life

resistance of AISI 304 stainless steel material the material does not cut

- savings on service interventions
- easy cleaning and maintenance of equipment

Degree of protection of the control elements IPX4

maintenance-free system resistance to splash water long life

- savings on service interventions
- easy cleaning and maintenance of equipment

Drain valve ¾" in the front part of the device with a safety lock against self-draining

outlet of the bath into the prepared container

- easy and safe handling

Cold zone

prevents food residues from burning there is no change in the taste of the oil

- longer oil life
- easy access and maintenance

Removable heating element

prevents food residues from burning there is no change in the taste of the oil

- fully removable electric box with heating element for convenient cleaning and servicing
- easy access even to corners and time saving

Higher rear chimney

prevention of spontaneous combustion

 safer heat dissipation and separation of oil and ventilation from the fryer

2 thermostats

safety and working thermostat

- traffic safety
- prevention of spontaneous combustion
- Prevention of oil flashover



Technical parameters

| Electric fryer 0,56 kW/l, 16 l on ca | binet 400 V | |
|---|---------------------------|--|
| Model | SAP Code | 00007381 |
| FE 66 ELT | A group of articles - web | Fryers and French Fries Holders |
| 1. SAP Code: 00007381 | | 15. Protection of controls: |
| 2. Net Width [mm]: 658 | | 16. Material: Stainless steel |
| 3. Net Depth [mm]: 609 | | 17. Indicators: operation and warm-up |
| 4. Net Height [mm]: 290 | | 18. Worktop material: AISI 304 |
| 5. Net Weight [kg]: 15.00 | | 19. Worktop Thickness [mm]: 0.80 |
| 6. Gross Width [mm]: 725 | | 20. Standard equipment for device: lid, basket, drain plug |
| 7. Gross depth [mm]: 710 | | 21. Basin volume [l]: |
| 8. Gross Height [mm]: 540 | | 22. Maximum device temperature [°C]: |
| 9. Gross Weight [kg]: 18.00 | | 23. Minimum device temperature [°C]: 50 |
| 10. Device type: Electric unit | | 24. Safety thermostat up to x ° C: 235 |
| 11. Construction type of device: Table top | | 25. Adjustable feet: Yes |
| 12. Power electric [kW]: 9.000 | | 26. Heating element material: AISI 304 |
| 13. Loading: 400 V / 3N - 50 Hz | | 27. Number of baskets: |
| 14. Ignition: | | 28. Basket size [mm]: |

Electric

455 x 245 x 80



Technical parameters

| Electric fryer 0,56 kW/l, 16 l on cabinet 400 V | | |
|---|---------------------------|---------------------------------|
| Model | SAP Code | 00007381 |
| FE 66 ELT | A group of articles - web | Fryers and French Fries Holders |

29. Heating element construction:

Large surface area coiled heating element for extended service life and even heating of the oil bath

30. Drain type:

On the front panel

31. Drain:

Yes

32. Heating location:

Inside the tank

33. Cross-section of conductors CU [mm²]:

2