

### **Product features**

Pizza oven counter top 2 chambers		
Model	SAP Code	00007250
FP 67 R	A group of articles - web	Pizza ovens




- Pizza capacity [cm]: 2x 35 cm
- Stoneplates: Lower
- Stone plates thickness [mm]: 14
- Material: Stainless steel
- Control type: Mechanical
- Type of handle: Short, plastic
- Steam protection: No
- Independent heating zones: Separate control for each chamber
- Chimney for moisture extraction: No
- Adjustable chimney: No
- Interior lighting: Yes

SAP Code	00007250	Minimum device tem- perature [°C]	50
Net Width [mm]	550	Maximum device tem- perature [°C]	300
Net Depth [mm]	510	Width of internal part [mm]	410
Net Height [mm]	380	Depth of internal part [mm]	370
Net Weight [kg]	35.00	Height of internal part [mm]	90
Power electric [kW]	2.700	Pizza capacity [cm]	2x 35 cm
Loading	230 V / 1N - 50 Hz		



Technical drawing

Pizza oven counter top 2 chambers		
Model	SAP Code	00007250
FP 67 R	A group of articles - web	Pizza ovens

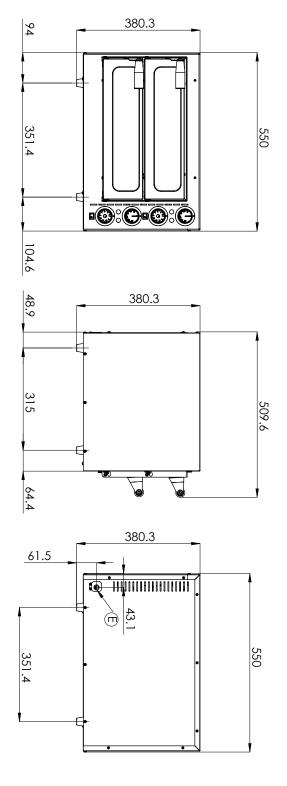



#### **Product benefits**

Pizza oven counter top 2 chambers		
Model	SAP Code	00007250
FP 67 R	A group of articles - web	Pizza ovens

#### Stainless steel outer shell construction

easy cleaning, high hygienic standard, long service life

- cost savings on the purchase of a new machine, time savings on cleaning and cleaning comfort

#### **Manual controls**

clear and simple user-friendly temperature settings

- quick and easy for the user to operate, no training required for operationlong service life

#### The device is powered from a regular 230v network

the device can be connected anywhere, in case of sufficient securing

- no need for sufficient costs if I do not have a 400V supply

#### Heating the chamber in the temperature range of 50 to 300°C

heating the chamber in the temperature range of 30 to 300 °C

- simple small compact pizza oven at a good price. ideal for chilled / frozen pizza where we save time and costs

#### The fireclay plate is placed in the lower part with the heaters that are under the plate

proper accumulation and uniformity of heat distribution

- no scorching and the pizza is evenly cooked and does not burn, no temperature fluctuation, no need for the cook to check and adjust the baking, lower demands on the knowledge and skills of the pizza maker

#### Glass set in the door

construction material is high quality stainless steel ensuring long life

high hygiene standard

- I don't lose temperature when baking by unnecessarily opening the door without glass, saving energy



### Technical parameters

Pizza oven counter top 2 chambe	ers	
Model	SAP Code	00007250
FP 67 R	A group of articles - web	Pizza ovens
<b>1. SAP Code:</b> 00007250		<b>15. Width of internal part [mm]:</b> 410
<b>2. Net Width [mm]:</b> 550		16. Depth of internal part [mm]: 370
3. Net Depth [mm]: 510		17. Height of internal part [mm]:
4. Net Height [mm]: 380		<b>18.</b> Minimum device temperature [°C]: 50
5. Net Weight [kg]: 35.00		19. Maximum device temperature [°C]: 300
6. Gross Width [mm]: 580		20. Pizza capacity [cm]: 2x 35 cm
7. Gross depth [mm]: 545		21. Indicators: operation
8. Gross Height [mm]: 435		22. Number of internal parts:
<b>9. Gross Weight [kg]:</b> 37.00		23. On/Off button: Yes
10. Material: Stainless steel		<b>24. Type of handle:</b> Short, plastic
11. Device type: Electric unit		<b>25. Steam protection:</b> No
12. Power electric [kW]: 2.700		<b>26. Protection of controls:</b> IPX4
<b>13. Loading:</b> 230 V / 1N - 50 Hz		27. Stoneplates: Lower
14. Control type:		28. Stone plates thickness [mm]:

14

Mechanical



### Technical parameters

Pizza oven counter top 2 chambers		
Model	SAP Code	00007250
FP 67 R	A group of articles - web	Pizza ovens
29. Independent heating zones: Separate control for each chamber		33. Chimney for moisture extraction:
30. Interior lighting:  Yes		34. Adjustable chimney:

0,75

35. Cross-section of conductors CU [mm<sup>2</sup>]:

32. Number of cavities:

safety thermostat

31. Safety element:

2