# Technical data sheet

Product features

| Hood type dishwasher single skin controls on TOP 50x50 400 V / 3N | | |
|---|---|---|
| **Model** | **SAP Code** | 00011315 |
| QQI 102/TOP | **A group of articles - web** | Undercounter, continuous and black ware dishwasher |



- Display type: 3 local display + diode bar
- Number of programs: 5
- Number of skin: 1
- Door clear height [mm]: 450
- Rack size [mm]: 500 x 500
- Drain pump: No
- Water consumption of the washing cycle [l/basket]: 2,1
- Washing cycle time [s/basket]: 60-120-150
- Detergent and rinse pump system: Accurate dosing with a peristaltic pump
- Wash pump type: DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: Double filtration with overflow discharge ensures only 18% loss of clean water to waste

| | | | |
|---|---|---|---|
| **SAP Code** | 00011315 | **Boiler power [kW]** | 8.000 |
| **Net Width [mm]** | 634 | **Basin volume [l]** | 15 |
| **Net Depth [mm]** | 744 | **Tank power [kW]** | 2.100 |
| **Net Height [mm]** | 1530 | **Water consumption of the washing cycle [l/basket]** | 2,1 |
| **Net Weight [kg]** | 110.00 | **Washing cycle time [s/basket]** | 60-120-150 |
| **Power electric [kW]** | 8.500 | **Door clear height [mm]** | 450 |
| **Loading** | 400 V / 3N - 50 Hz | **Rack size [mm]** | 500 x 500 |
| **Boiler capacity [ l ]** | 6.00 | **Noise of device** | 60,4 |




RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062

# Technical data sheet

Technical drawing

| Hood type dishwasher single skin controls on TOP 50x50 400 V / 3N | | |
|---|---|---|
| **Model** | **SAP Code** | 00011315 |
| QQI 102/TOP | **A group of articles - web** | Undercounter, continuous and black ware dishwasher |

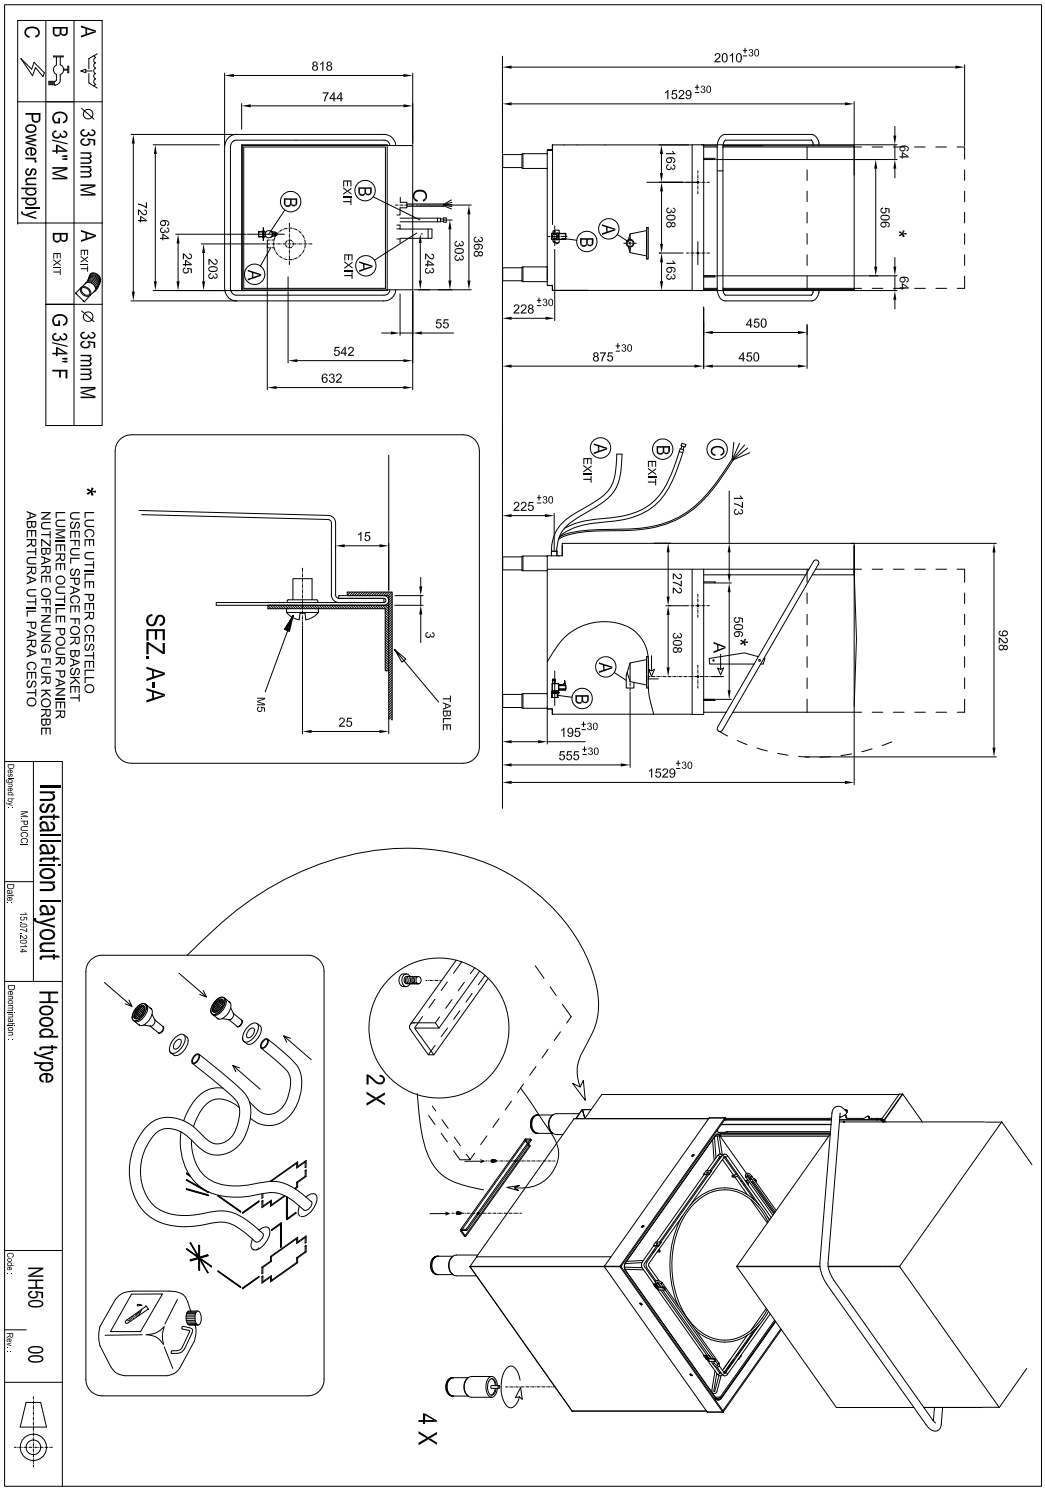




RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062

# Technical data sheet

Product benefits

| Hood type dishwasher single skin controls on TOP 50x50 400 V / 3N | | |
|---|---|---|
| **Model** | **SAP Code** | 00011315 |
| QQI 102/TOP | **A group of articles - web** | Undercounter, continuous and black ware dishwasher |

**1 Stainless steel outer shell construction**

round construction with stainless steel, rounded edges, partially pressed tub

- easy cleaning, high hygiene standard, long service life

**2 Washing arms with a component, common for washing and rinsing**

washing arms made of composite material
common arm for washing and rinsing
integrated screw secured against falling out

- easy and safe handling during cleaning; higher user comfort

**3 LED Display**

three-line display
diode strip

- easy control of the dishwasher operation
- continuous information on the status of the wash cycle
- diagnostics in the event of a fault

**4 Double pump**

unique two-way DuoFlow pump

- distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump

**5 Molded basket supports**

guide rails for the baskets molded from the body of the dishwasher

- high hygiene standard
- longer service life

**6 Detergent dispensers**

two detergent and rinse aid dispensers

- precise chemical dosing by ProDose - precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel

**7 Double filter system**

the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency

- higher washing efficiency; longer life of the washing bath

**8 Energy saving**

energy saving energy saving system due to lowering the temperature of the boiler

- cost saving



RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062

# Technical data sheet

Technical parameters

| Hood type dishwasher single skin controls on TOP 50x50 400 V / 3N | | |
|---|---|---|
| **Model** | **SAP Code** | 00011315 |
| QQI 102/TOP | **A group of articles - web** | Undercounter, continuous and black ware dishwasher |

1. **SAP Code:**
   00011315
2. **Net Width [mm]:**
   634
3. **Net Depth [mm]:**
   744
4. **Net Height [mm]:**
   1530
5. **Net Weight [kg]:**
   110.00
6. **Gross Width [mm]:**
   724
7. **Gross depth [mm]:**
   818
8. **Gross Height [mm]:**
   1579
9. **Gross Weight [kg]:**
   120.00
10. **Device type:**
    Electric unit
11. **Control type:**
    Digital
12. **Material:**
    AISI 304
13. **Power electric [kW]:**
    8.500
14. **Loading:**
    400 V / 3N - 50 Hz
15. **Additional information:**
    Also possible: 230 V / 3N or 230 V / 1N (must be specified when ordering)
16. **Rack size [mm]:**
    500 x 500
17. **Number of programs:**
    5
18. **Opening of device:**
    Flip up
19. **Door clear height [mm]:**
    450
20. **Inlet pressure [bar]:**
    2-4
21. **Adjustable feet:**
    Yes
22. **Number of skin:**
    1
23. **Self-cleaning cycle:**
    Yes
24. **Boiler capacity [ l ]:**
    6.00
25. **Boiler power [kW]:**
    8.000
26. **Basin volume [l]:**
    15
27. **Tank power [kW]:**
    2.100
28. **Number of arms for both rinsing and washing:**
    2



RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062

# Technical data sheet

Technical parameters

| Hood type dishwasher single skin controls on TOP 50x50 400 V / 3N | | |
|---|---|---|
| **Model** | **SAP Code** | 00011315 |
| QQI 102/TOP | **A group of articles - web** | Undercounter, continuous and black ware dishwasher |

**29. Arm connection:**
Hand loosen/tighten screw

**30. Washing arm type:**
Rotatable two-pronged

**31. Washing arm material:**
Composite

**32. Rinsing arm type:**
Rotating two-pronged

**33. Rinsing arm material:**
Composite

**34. Deep drawn tank:**
Yes

**35. Tank surface strainers:**
composite

**36. Drain filter:**
Double filtration with overflow discharge ensures only 18% loss of clean water to waste

**37. Thermostop:**
Yes

**38. Boiler thermostat adjust:**
Yes

**39. Rack feed capacity:**
24-30-60

**40. Detergent and rinse pump system:**
Accurate dosing with a peristaltic pump

**41. Energy Saving system:**
Energy saving system due to lowering the boiler temperature

**42. Hot water electric valve:**
Yes

**43. Display type:**
3 local display + diode bar

**44. Location of control panel:**
On the top

**45. USB port:**
Yes, for Firmware actualisation

**46. Drain pump:**
No

**47. Self-diagnostics:**
Yes

**48. Wash pump type:**
DuoFlow

**49. Detergent dispenser:**
Yes

**50. Rinse aid dispenser:**
Yes

**51. Water consumption of the washing cycle [l/basket]:**
2,1

**52. Washing cycle time [s/basket]:**
60-120-150

**53. Rinse water temperature [°C]:**
80

**54. Standard equipment for device:**
1x glass basket, 1x plate basket, 1x cutlery basket



RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062

# Technical data sheet

Technical parameters

| Hood type dishwasher single skin controls on TOP 50x50 400 V / 3N | | |
|---|---|---|
| **Model** | **SAP Code** | 00011315 |
| QQI 102/TOP | **A group of articles - web** | Undercounter, continuous and black ware dishwasher |

**55. Program ProSpeed:**
Yes

**56. Program ProFessional:**
Yes

**57. Program ProTemp:**
Yes

**58. Program ProSelf:**
Yes

**59. Program ProLong:**
Yes

**60. Noise of device:**
60,4

**61. Cross-section of conductors CU [mm²]:**
1,5

**62. Water supply connection:**
3/4”

**63. Diameter nominal:**
DN 50



RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062