

# Technical data sheet

## Product features



### Fry-top griddle plate 71x65 electric combined on open cabinet 400 V

|              |                                  |                         |
|--------------|----------------------------------|-------------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00012403                |
| FTHR 90/80 E | <b>A group of articles - web</b> | Grills and grill plates |



- Top type: Combined
- Worktop material: Sandblasted steel
- Maximum device temperature [°C]: 300

|                        |          |                            |                    |
|------------------------|----------|----------------------------|--------------------|
| <b>SAP Code</b>        | 00012403 | <b>Net Weight [kg]</b>     | 126.00             |
| <b>Net Width [mm]</b>  | 800      | <b>Power electric [kW]</b> | 12.000             |
| <b>Net Depth [mm]</b>  | 900      | <b>Loading</b>             | 400 V / 3N - 50 Hz |
| <b>Net Height [mm]</b> | 900      | <b>Top type</b>            | Combined           |




# Technical data sheet

Technical drawing



## Fry-top griddle plate 71x65 electric combined on open cabinet 400 V

|              |                                  |                         |
|--------------|----------------------------------|-------------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00012403                |
| FTHR 90/80 E | <b>A group of articles - web</b> | Grills and grill plates |

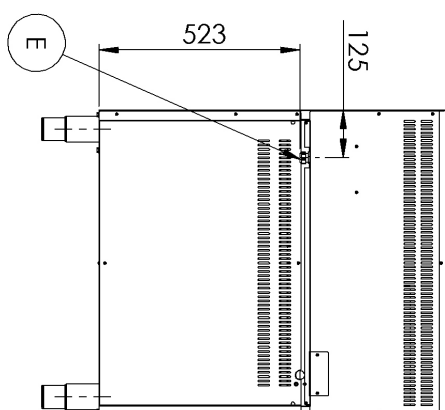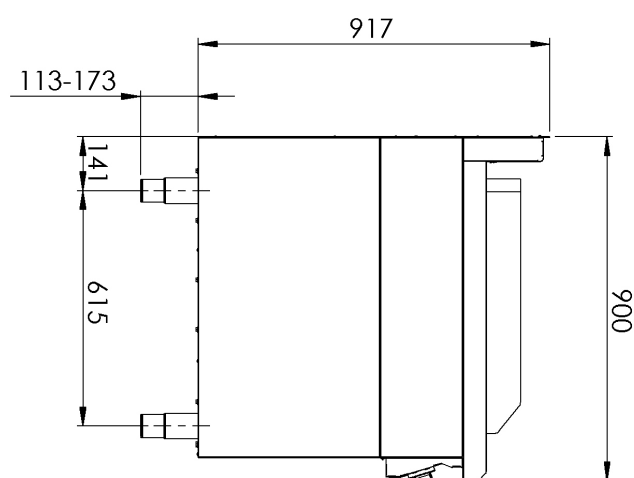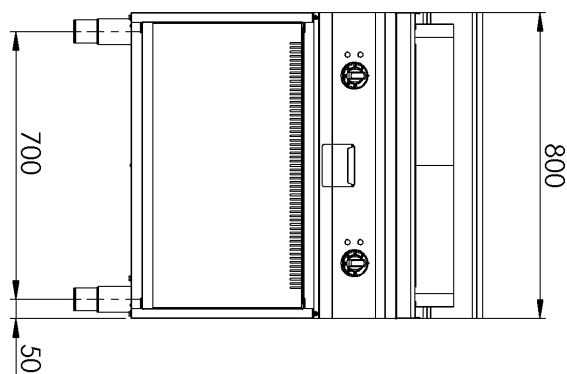

# Technical data sheet



## Product benefits

### Fry-top griddle plate 71x65 electric combined on open cabinet 400 V

|              |                           |                         |
|--------------|---------------------------|-------------------------|
| Model        | SAP Code                  | 00012403                |
| FTHR 90/80 E | A group of articles - web | Grills and grill plates |

1

#### All-stainless design

- long life
- corrosion resistance of the top plate material
  - savings on service interventions
  - higher corrosion resistance

2

#### Degree of protection of the control elements IPX4

- maintenance-free system
- resistance to splash water
- long life
  - savings on service interventions
  - easy cleaning and maintenance of equipment

3

#### Outlet for waste liquids

- ensures that oil drips into the socket
  - easy maintenance
  - easy cleaning

4

#### High detachable hem

- better hygienic conditions
- preventing grease from splashing onto ancillary equipment
  - easy maintenance
  - easy cleaning

5

#### Combined steel plate

- good heat transfer and the surface does not get scratched
- enables preparation on smooth or grooved plates
  - time-saving in food preparation
  - easy preparation of different types of dishes

6

#### Two-zone hotplate control

- allows you to prepare several dishes at the same time in different stages of preparation
  - time saving
  - high productivity

# Technical data sheet

## Technical parameters



### Fry-top griddle plate 71x65 electric combined on open cabinet 400 V

|              |                                  |                         |
|--------------|----------------------------------|-------------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00012403                |
| FTHR 90/80 E | <b>A group of articles - web</b> | Grills and grill plates |

**1. SAP Code:**

00012403

**2. Net Width [mm]:**

800

**3. Net Depth [mm]:**

900

**4. Net Height [mm]:**

900

**5. Net Weight [kg]:**

126.00

**6. Gross Width [mm]:**

970

**7. Gross depth [mm]:**

840

**8. Gross Height [mm]:**

1160

**9. Gross Weight [kg]:**

145.00

**10. Device type:**

Electric unit

**11. Construction type of device:**

Stationary

**12. Power electric [kW]:**

12.000

**13. Loading:**

400 V / 3N - 50 Hz

**14. Protection of controls:**

IPX4

**15. Material:**

AISI 304 top plate, AISI 430 cladding

**16. Worktop material:**

Sandblasted steel

**17. Worktop Thickness [mm]:**

15.00

**18. Maximum device temperature [°C]:**

300

**19. Minimum device temperature [°C]:**

50

**20. Adjustable feet:**

Yes

**21. Top type:**

Combinated

**22. Cross-section of conductors CU [mm²]:**

4