

Product features

Convection oven gas 20x GN 1/1 Spray, touch color display, right door		
Model	SAP Code	00020602
MPD 2011 GRAM	A group of articles - web	Convection machines




- Steam type: Injection
- Number of GN / EN: 20
- GN / EN size in device: GN 1/1, EN 600x400
- Control type: Touchscreen + buttons
- Advanced moisture adjustment: Supersteam two steam saturation modes
- Delta T heat preparation: Yes
- Automatic preheating: Yes
- Multi level cooking: Drawer program control of heat treatment for each dish separately
- Door constitution: Vented safety double glass, removable for easy cleaning


SAP Code	00020602	Power gas [kW]	36.000
Net Width [mm]	995	Type of gas	Natural gas, propane butane
Net Depth [mm]	835	Steam type	Injection
Net Height [mm]	1850	Number of GN / EN	20
Net Weight [kg]	270.00	GN / EN size in device	GN 1/1, EN 600x400
Power electric [kW]	0.300	Control type	Touchscreen + buttons
Loading	230 V / 1N - 50 Hz	Maximal height of GN [mm]	65





Technical drawing

Convection oven gas 20x GN 1/1 Spray, touch color display, right door		
Model	SAP Code	00020602
MPD 2011 GRAM	A group of articles - web	Convection machines

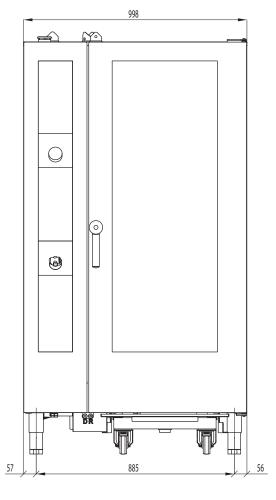

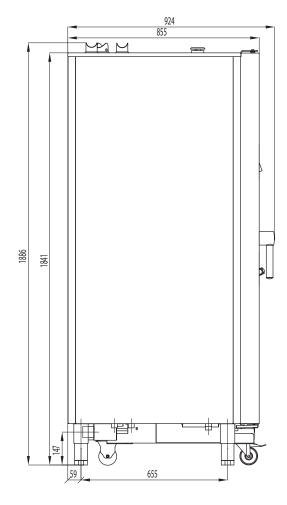

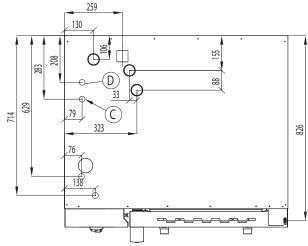





Product benefits

Convection oven gas 20x GN 1/1 Spray, touch color display, right door		
Model	SAP Code	00020602
MPD 2011 GRAM	A group of articles - web	Convection machines

Rapid chamber ventilation system

quick ventilation of odors

- saving time and costs

Double glazed ventilation doors (panels can be opened)

easy to clean and wash

- facilitating human work and strength - happier staff

LED cooking chamber lighting

overview inside the combi oven

- saving time and costs, when we do not open the convection oven, hot air does not escape

Boiling chamber AISI 304 with curved corners easy to clean and wash

- facilitating human work and strength - happier staff

Height adjustable feet

traffic variability

- height adjustment option

Control with a single button

simplicity

time savings; facilitating human work and strength - happier staff

Carriage

cooks and handles up to 20 GN at a time

- low operating costs, saving time and money

Preset cooking programs
the possibility of controlling 9 cooking phases for each of them

- saving time and costs

One Touch cooking mode
immediate start of the cooking cycle "with one touch of the program"

- saving time and costs

Easy service

the possibility of cooking different dishes at the same time

- saving time and costs

Super Steam
possibility to set 2 levels of humidity

tasty balanced meals

Hold function

possibility of keeping food warm, immediate serving

- saving time and costs

Regenerative function

food regeneration

 tasty and more valuable food, nice appearance of the dish.

Rack control

the possibility of serving all dishes at the same time in one place $% \left(1\right) =\left(1\right) \left(1\right)$

saving time and costs



Technical parameters

Convection oven gas 20x GN	I 1/1 Spray, touch color dis	splay, right door
Model	SAP Code	00020602
MPD 2011 GRAM	A group of articles - web	Convection machines
1. SAP Code: 00020602		15. Material: AISI 304
2. Net Width [mm]: 995		16. Exterior color of the device: Stainless steel
3. Net Depth [mm]: 835		17. Width of internal part [mm]: 480
4. Net Height [mm]: 1850		18. Depth of internal part [mm]:
5. Net Weight [kg]: 270.00		19. Height of internal part [mm]:
6. Gross Width [mm]: 1150		20. Adjustable feet: Yes
7. Gross depth [mm]: 1050		21. Control type: Touchscreen + buttons
8. Gross Height [mm]: 2100		22. Additional information: Gas convection oven 20x GN 1/1 injection, touch color display, right door
9. Gross Weight [kg]: 300.00		23. Steam type: Injection
10. Device type: Gas unit		24. Chimney for moisture extraction: Yes
11. Power electric [kW]: 0.300		25. Delayed start: Yes
12. Loading: 230 V / 1N - 50 Hz 13. Power gas [kW]: 36.000		26. Delta T heat preparation: Yes 27. Automatic preheating: Yes

Natural gas, propane butane

Yes



Technical parameters

Convection oven gas 20x GN 1/2	1 Spray, touch color displ	ay, right door
Model	SAP Code	00020602
MPD 2011 GRAM	A group of articles - web	Convection machines
29. Night cooking: Yes		42. Distance between the layers [mm]: 65
30. Washing system: Closed - efficient use of water and washing chemicals by repeated pumping		43. Interior lighting: Yes
31. Detergent type: Liquid washing detergent + water rinse		44. Low temperature heat treatment: Yes
32. Multi level cooking: Drawer program - control of heat treatment for each dish separately		45. Number of fans:
33. Advanced moisture adjustment: Supersteam - two steam saturation modes		46. Number of fan speeds:
34. Slow cooking: from 50 °C		47. USB port: Yes, for uploading recipes and updating firmware
35. Fan stop: Immediate when the door is opened		48. Door constitution: Vented safety double glass, removable for easy cleaning
36. Lighting type: LED		49. Number of recipe steps: 9
37. Cavity material and shape: AISI 304, with rounded corners for easy cleaning		50. Maximum device temperature [°C]: 300
38. Reversible fan: Yes		51. Device heating type: Combination of steam and hot air
39. Sustaince box: Yes		52. Number of GN / EN: 20
40. Probe: yes		53. GN / EN size in device: GN 1/1, EN 600x400
41. Shower: Pull-out		54. Food regeneration: Yes



Technical parameters

Convection oven gas 20x GN 1/1 Spray, touch color display, right door		
Model	SAP Code	00020602
MPD 2011 GRAM	A group of articles - web	Convection machines
55. Maximal height of GN [mm]: 65		57. Diameter nominal: DN 50
56. Connection to a ball valve: $1/2$		58. Water supply connection: 3/4"