

Technical data sheet

Product features



Blast chiller 5x GN 1/1 with wheels and LED lighting

Model	SAP Code	00038862
SHFN 0511 KL LED	A group of articles - web	Šokery a multifunkční zařízení



- Minimum device temperature [°C]: -40
- Maximum device temperature [°C]: 3
- Probe: 1-bodová
- Insulation thickness [mm]: 60
- Control type: Digital

SAP Code	00038862	Loading	230 V / 1N - 50 Hz
Net Width [mm]	760	Number of GN / EN	5
Net Depth [mm]	710	GN / EN size in device	GN 1/1, EN 600x400
Net Height [mm]	830	GN device depth	40
Net Weight [kg]	88.00	Control type	Digital
Power electric [kW]	0.797		




Technical data sheet

Technical drawing



Blast chiller 5x GN 1/1 with wheels and LED lighting

Model	SAP Code	00038862
SHFN 0511 KL LED	A group of articles - web	Šokery a multifunkční zařízení

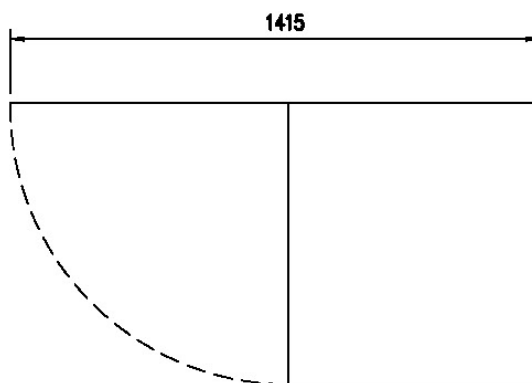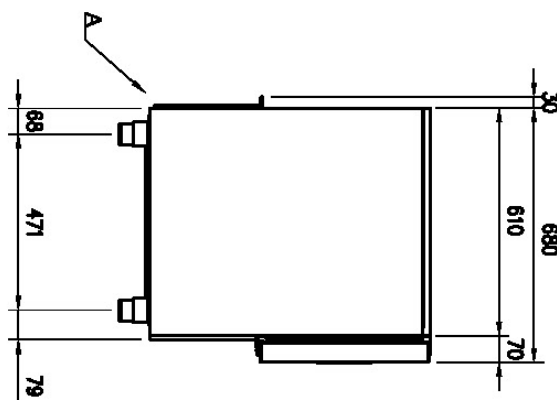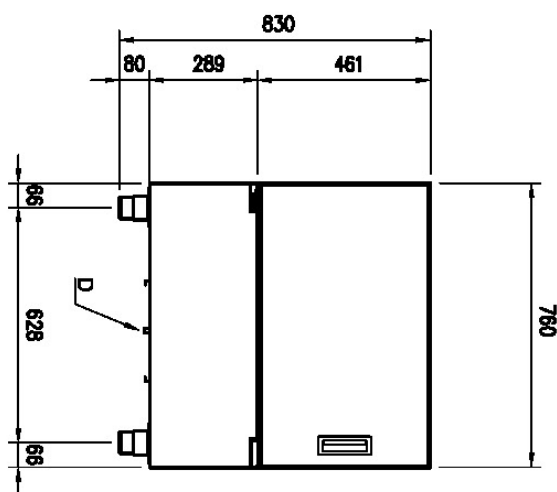

A = ELECTRICAL CONNECTION
D = WATER DISCHARGE ø18 G1/2

Technical data sheet

Technical parameters



Blast chiller 5x GN 1/1 with wheels and LED lighting

Model	SAP Code	00038862
SHFN 0511 KL LED	A group of articles - web	Šokery a multifunkční zařízení

1. SAP Code:

00038862

2. Net Width [mm]:

760

3. Net Depth [mm]:

710

4. Net Height [mm]:

830

5. Net Weight [kg]:

88.00

6. Gross Width [mm]:

800

7. Gross depth [mm]:

778

8. Gross Height [mm]:

980

9. Gross Weight [kg]:

104.00

10. Device type:

Electric unit

11. Exterior color of the device:

Stainless steel

12. Opening of device:

Hinges on the left

13. Power electric [kW]:

0.797

14. Loading:

230 V / 1N - 50 Hz

15. Control type:

Digital

16. Refrigerant:

R290

17. Number of GN / EN:

5

18. GN / EN size in device:

GN 1/1, EN 600x400

19. GN device depth:

40

20. Minimum device temperature [°C]:

-40

21. Maximum device temperature [°C]:

3

22. Insulation thickness [mm]:

60

23. Probe:

1-bodová

24. Adjustable feet:

Yes

25. Cross-section of conductors CU [mm²]:

0,5