Technical data sheet

Product features

Cooling cabinet 113 l, stainless steel 230 V / 1N		
Model	**SAP Code**	00039848
DNR 200 S	**A group of articles - web**	Refrigeration and freezer cabinets



- Chamber volume [l]: 113
- Minimum device temperature [°C]: 0
- Maximum device temperature [°C]: 10
- Insulation thickness [mm]: 70
- Control type: Digital
- Interior lighting: No
- Door lock: Yes
- Opening of device: Two-sided
- Automatic defrost: Yes
- Annual energy consumption [kWh]: 154


SAP Code	00039848	**Gross Volume [m3]**	0.407
Net Width [mm]	595	**Net Volume [m3]**	0.321
Net Depth [mm]	650	**Minimum device temperature [°C]**	0
Net Height [mm]	830	**Maximum device temperature [°C]**	10
Net Weight [kg]	35.00	**Refrigerant**	R600a
Power electric [kW]	0.063	**Noise of device**	51,2-52,3
Loading	230 V / 1N - 50 Hz	**Load capacity [kg]**	30
Energy class	A++	**Refrigerant weight [g]**	35.00
Chamber volume [l]	113	**Climate class**	4


tel.: +420 381 582 284
e-mail: rmgastro@rmgastro.com
web: www.rmgastro.com


Technical data sheet

Technical drawing

Cooling cabinet 113 l, stainless steel 230 V / 1N		
Model	**SAP Code**	00039848
DNR 200 S	**A group of articles - web**	Refrigeration and freezer cabinets

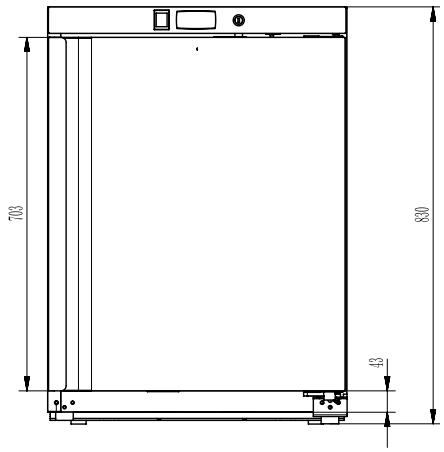

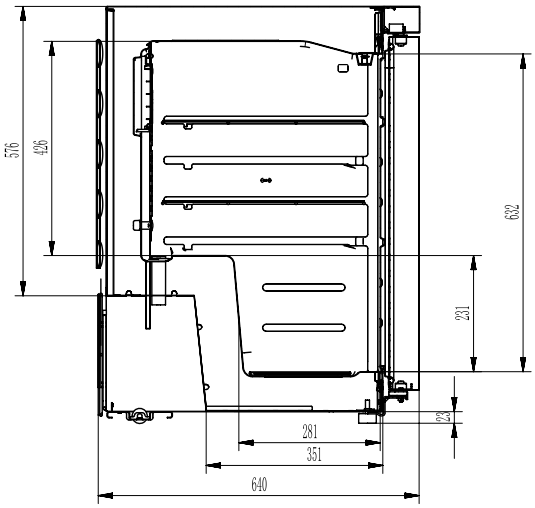

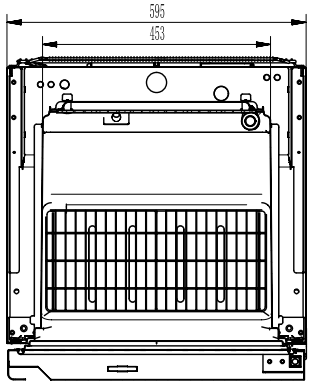

tel.: +420 381 582 284
e-mail: rmgastro@rmgastro.com
web: www.rmgastro.com

Technical data sheet

Product benefits

Cooling cabinet 113 l, stainless steel 230 V / 1N		
Model	**SAP Code**	00039848
DNR 200 S	**A group of articles - web**	Refrigeration and freezer cabinets

1 **Energy class A++ – annual energy consumption 154 kWh**

Very energy-efficient operation

- Reduced energy costs

2 **Insulation 70 mm**

Thick PU insulation, lower heat loss

- Lower energy consumption and stable internal temperature even at higher ambient temperatures (up to 38 °C)

3 **Automatic defrost**

Minimal staff intervention required

- Saves staff time and ensures more reliable operation

4 **Pressed drawers**

GN containers can be inserted without using shelves

- Space saving, better ergonomics

5 **All-stainless design of parts that are in the contract with foodstuffs**

used stainless steel intended for contact with food
good maintenance
zero contamination
resists even weaker acids

- long service life and high durability

tel.: +420 381 582 284
e-mail: rmgastro@rmgastro.com
web: www.rmgastro.com

Technical data sheet

Technical parameters

Cooling cabinet 113 l, stainless steel 230 V / 1N		
Model	**SAP Code**	00039848
DNR 200 S	**A group of articles - web**	Refrigeration and freezer cabinets

1. **SAP Code:**
   00039848
2. **Net Width [mm]:**
   595
3. **Net Depth [mm]:**
   650
4. **Net Height [mm]:**
   830
5. **Net Weight [kg]:**
   35.00
6. **Gross Width [mm]:**
   630
7. **Gross depth [mm]:**
   680
8. **Gross Height [mm]:**
   950
9. **Gross Weight [kg]:**
   41.00
10. **Device type:**
    Electric unit
11. **Power electric [kW]:**
    0.063
12. **Loading:**
    230 V / 1N - 50 Hz
13. **Energy class:**
    A++
14. **Refrigerant:**
    R600a
15. **Cooling type:**
    Static with fan
16. **Material:**
    Stainless steel
17. **Exterior color of the device:**
    Stainless steel
18. **Min ambient temperature [°C]:**
    0
19. **Max ambient temperature [°C]:**
    38
20. **Device properties 2:**
    Cooling
21. **Chamber volume [l]:**
    113
22. **Gross Volume [m3]:**
    0.407
23. **Net Volume [m3]:**
    0.321
24. **Worktop material:**
    SS201
25. **Adjustable feet:**
    Yes
26. **Insulation thickness [mm]:**
    70
27. **Opening of device:**
    Two-sided
28. **Gasket:**
    Yes

tel.: +420 381 582 284
e-mail: rmgastro@rmgastro.com
web: www.rmgastro.com

Technical data sheet

Technical parameters

Cooling cabinet 113 l, stainless steel 230 V / 1N		
Model	**SAP Code**	00039848
DNR 200 S	**A group of articles - web**	Refrigeration and freezer cabinets

29. Number of doors:
1

30. Unit:
Yes

31. Control type:
Digital

32. Door lock:
Yes

33. Interior lighting:
No

34. Annual energy consumption [kWh]:
154

35. Minimum device temperature [°C]:
0

36. Maximum device temperature [°C]:
10

37. Automatic defrost:
Yes

38. Defrosting cycle:
No

39. Noise of device:
51,2-52,3

40. Load capacity [kg]:
30

41. Refrigerant weight [g]:
35.00

42. Number of grids:
3

43. Grid size [mm x mm]:
479x405

44. Climate class:
4

45. Cross-section of conductors CU [mm²]:
0,5

tel.: +420 381 582 284
e-mail: rmgastro@rmgastro.com
web: www.rmgastro.com