

# Technical data sheet

## Product features



### Fry-top griddle plate 31x65 electric smooth on open cabinet 400 V

|              |                                  |                         |
|--------------|----------------------------------|-------------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00012295                |
| FTH 90/40 E  | <b>A group of articles - web</b> | Grills and grill plates |



- Top type: Smooth
- Griddle thickness [mm]: 15.00
- Worktop material: Sandblasted steel
- Maximum device temperature [°C]: 300

|                        |          |                            |                    |
|------------------------|----------|----------------------------|--------------------|
| <b>SAP Code</b>        | 00012295 | <b>Net Weight [kg]</b>     | 71.00              |
| <b>Net Width [mm]</b>  | 400      | <b>Power electric [kW]</b> | 6.000              |
| <b>Net Depth [mm]</b>  | 900      | <b>Loading</b>             | 400 V / 3N - 50 Hz |
| <b>Net Height [mm]</b> | 900      | <b>Top type</b>            | Smooth             |


# Technical data sheet



Technical drawing

Fry-top griddle plate 31x65 electric smooth on open cabinet 400 V

|             |                           |                         |
|-------------|---------------------------|-------------------------|
| Model       | SAP Code                  | 00012295                |
| FTH 90/40 E | A group of articles - web | Grills and grill plates |

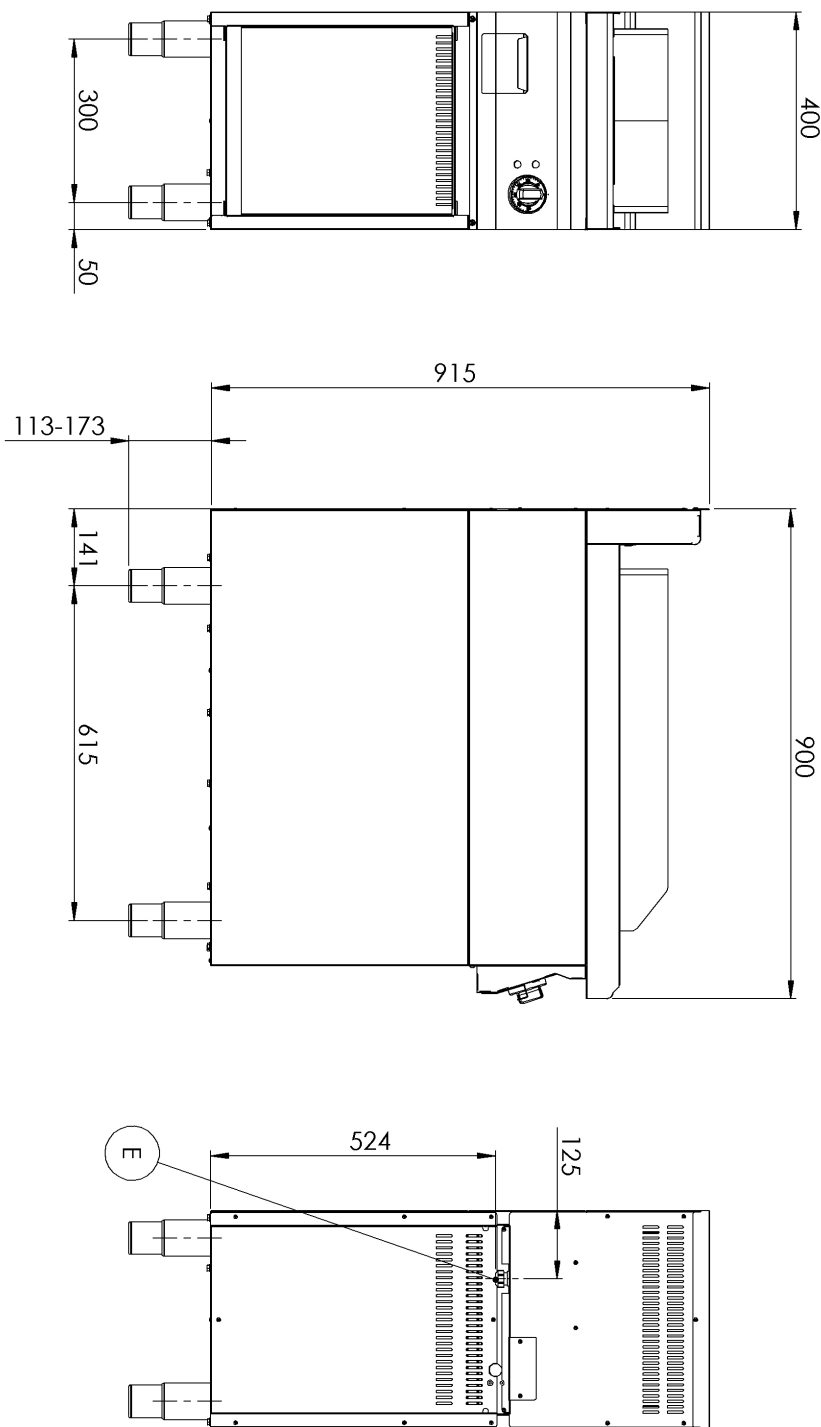

# Technical data sheet



## Product benefits

### Fry-top griddle plate 31x65 electric smooth on open cabinet 400 V

|              |                                  |                         |
|--------------|----------------------------------|-------------------------|
| <b>Model</b> | <b>SAP Code</b>                  | 00012295                |
| FTH 90/40 E  | <b>A group of articles - web</b> | Grills and grill plates |

1

#### All-stainless design

- long life
- corrosion resistance of the top plate material
  - savings on service interventions
  - easier and faster operation

2

#### Degree of protection of the control elements IPX4

- maintenance-free system
- resistance to splash water
- long life
  - savings on service interventions
  - easy cleaning and maintenance of equipment

3

#### Outlet for waste liquids

- ensures that oil drips into the socket
  - easy maintenance
  - easy cleaning

4

#### High detachable hem

- better hygienic conditions
- preventing grease from splashing onto ancillary equipment
  - easy maintenance
  - easy cleaning

5

#### Smooth steel plate

- good heat transfer and the surface does not get scratched
- enables preparation on smooth or grooved plates
  - time-saving for food preparation
  - no reheating and long cooking times

# Technical data sheet

## Technical parameters



### Fry-top griddle plate 31x65 electric smooth on open cabinet 400 V

|                    |                                  |                         |
|--------------------|----------------------------------|-------------------------|
| <b>Model</b>       | <b>SAP Code</b>                  | 00012295                |
| <b>FTH 90/40 E</b> | <b>A group of articles - web</b> | Grills and grill plates |

**1. SAP Code:**

00012295

**2. Net Width [mm]:**

400

**3. Net Depth [mm]:**

900

**4. Net Height [mm]:**

900

**5. Net Weight [kg]:**

71.00

**6. Gross Width [mm]:**

970

**7. Gross depth [mm]:**

440

**8. Gross Height [mm]:**

1140

**9. Gross Weight [kg]:**

80.00

**10. Device type:**

Electric unit

**11. Construction type of device:**

Stationary

**12. Power electric [kW]:**

6.000

**13. Loading:**

400 V / 3N - 50 Hz

**14. Protection of controls:**

IPX4

**15. Material:**

AISI 304 top plate, AISI 430 cladding

**16. Worktop material:**

Sandblasted steel

**17. Worktop Thickness [mm]:**

15.00

**18. Maximum device temperature [°C]:**

300

**19. Minimum device temperature [°C]:**

50

**20. Adjustable feet:**

Yes

**21. Griddle thickness [mm]:**

15.00

**22. Top type:**

Smooth

**23. Cross-section of conductors CU [mm²]:**

1