

Technical data sheet



Product features

Slicer, blade 275 mm plain

Model	SAP Code	00020254
GSP 275	A group of articles - web	Cutting machines



- Blade type: Smooth
- Blade diameter [mm]: 275
- Cutting thickness [mm]: 1-14
- Transfer type: Strappy
- Material: Aluminium
- Safety cover: transparent plexiglass
- Safety element: Two buttons on off switch.

safety cover

- Table position: Oblique
- On/Off button: Yes

SAP Code	00020254	Power electric [kW]	0.180
Net Width [mm]	410	Loading	230 V / 1N - 50 Hz
Net Depth [mm]	530	Blade type	Smooth
Net Height [mm]	420	Blade diameter [mm]	275
Net Weight [kg]	14.20	Cutting thickness [mm]	1-14


Technical data sheet

Technical drawing



Slicer, blade 275 mm plain

Model	SAP Code	00020254
GSP 275	A group of articles - web	Cutting machines

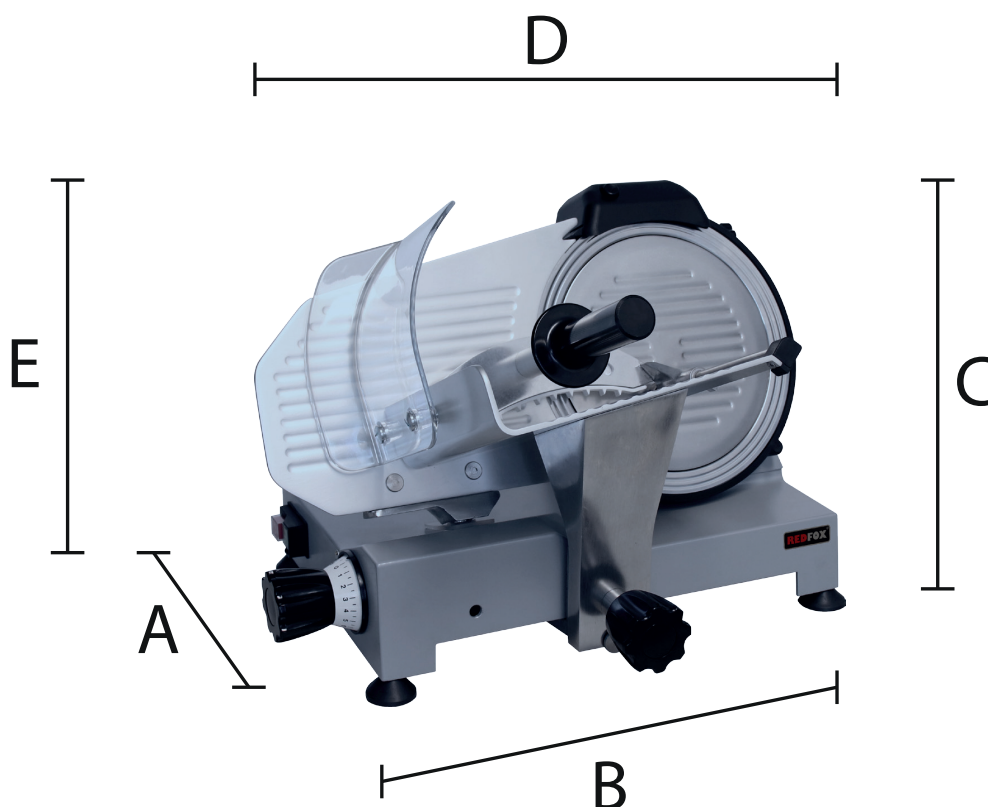

Model	Rozměry (cm)	Váha (kg)	Elektrické připojení
GSP 250	30 x 44 x 41 x 51 x 39	13,5	230 x 50 x 1
GSP 275	30 x 44 x 41 x 53 x 42	14,2	230 x 50 x 1
GSP 300	30 x 44 x 41 x 55 x 42	16	230 x 50 x 1
GSP 300 XL	33 x 48 x 47 x 57 x 47	23	230 x 50 x 1

Technical data sheet



Product benefits

Slicer, blade 275 mm plain

Model	SAP Code	00020254
GSP 275	A group of articles - web	Cutting machines

1

The slicer is built with polished cast aluminum.
strength, high corrosion resistance, thermal conductivity
– longer service life of the cutting machine

2

Very sturdy and easy to use and clean with little maintenance.
easy to use and clean
– time savings

3

Excellent for cutting meats, vegetables and cheeses.
variability of use for different foods
– cost savings

4

The blade is made in non sticking steel with special grooves.
the food does not stick, the flow of work
– time saving, uncomplicated work

5

Fixed sharpening with bowl to maintain stones clean from food residues.
the possibility of sharpening the knife without adding a sharpener
– saving time, manpower, costs

6

Sliding carriage on teflon bushings with an heavy duty food holder with removable nails for easy cleaning.
fluidity of work, easy cleaning
– saving human labor, time

7

Removing carriage with block sail according to security rules.
the food cart can be removed
– higher safety, easy cleaning

8

Strong fan silenced professional motor.
lower noise
– health protection

9

Two buttons on off switch.
safety feature
– health protection, safety

10

The slicer was designed and manufactured according to international standards for safety, hygiene and food contact.
meets strict safety and hygiene standards
– higher safety, hygiene

11

Slicing thickness 0-14 mm.
variability of the thickness of the sliced product
– cost savings

12

According to the CE rules professional use.
use in highly specialized and professional operations
– professional product - prestige

Technical data sheet

Technical parameters



Slicer, blade 275 mm plain

Model	SAP Code	00020254
GSP 275	A group of articles - web	Cutting machines

1. SAP Code:

00020254

2. Net Width [mm]:

410

3. Net Depth [mm]:

530

4. Net Height [mm]:

420

5. Net Weight [kg]:

14.20

6. Gross Width [mm]:

500

7. Gross depth [mm]:

400

8. Gross Height [mm]:

580

9. Gross Weight [kg]:

17.30

10. Device type:

Electric unit

11. Material:

Aluminium

12. Exterior color of the device:

Grey

13. Power electric [kW]:

0.180

14. Loading:

230 V / 1N - 50 Hz

15. Control type:

Electric

16. Safety cover:

transparent plexiglass

17. Safety element:

Two buttons on off switch.

safety cover

18. Engine protection:

ventilator

19. Main switch:

Yes

20. Unmountable head:

No

21. Transfer type:

Strappy

22. Standard equipment for device:

whetstone

23. Additional information:

Noise N. 62 DB

24. Blade type:

Smooth

25. Blade diameter [mm]:

275

26. On/Off button:

Yes

Technical data sheet

Technical parameters



Slicer, blade 275 mm plain

Model	SAP Code	00020254
GSP 275	A group of articles - web	Cutting machines

27. Removable moving table:

Yes

28. Anti-adhesive blade treatment:

Yes

29. Table position:

Oblique

30. Blade cover material:

Plastic

31. Sharpening device:

Integrated

32. Cutting thickness [mm]:

1-14

33. Cross-section of conductors CU [mm²]:

0,5