

Product features

Hood type dishwasher single skin with drain pump controls on TOP 50x50 - 400 V		
Model	SAP Code	00011316
QQI 102 P/TOP	A group of articles - web	Undercounter, continuous and black ware dishwasher




- Display type: 3 local display + diode bar
- Number of programs: 6
- Number of skin: 1
- Door clear height [mm]: 450
- Rack size [mm]: 500 x 500
- Water consumption of the washing cycle [l/basket]: 2,1
- Washing cycle time [s/basket]: 60-120-150
- Detergent and rinse pump system: ProDose accurate dosing with a peristaltic pump
- Wash pump type: two-way DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: ArchiMedes double filtration with overflow discharge ensures only 18% loss of clean water to waste

SAP Code	00011316	Boiler power [kW]	8.000
Net Width [mm]	634	Basin volume [l]	15
Net Depth [mm]	744	Tank power [kW]	2.100
Net Height [mm]	1530	Water consumption of the washing cycle [l/basket]	2,1
Net Weight [kg]	111.00	Washing cycle time [s/basket]	60-120-150
Power electric [kW]	8.500	Door clear height [mm]	450
Loading	400 V / 3N - 50 Hz	Rack size [mm]	500 x 500
Boiler capacity [l]	6.00	Noise of device	60,4



Technical drawing

Hood type dishwasher single skin with drain pump controls on TOP 50x50 - 400 V		
Model	SAP Code	00011316
QQI 102 P/TOP	A group of articles - web	Undercounter, continuous and black ware dishwasher

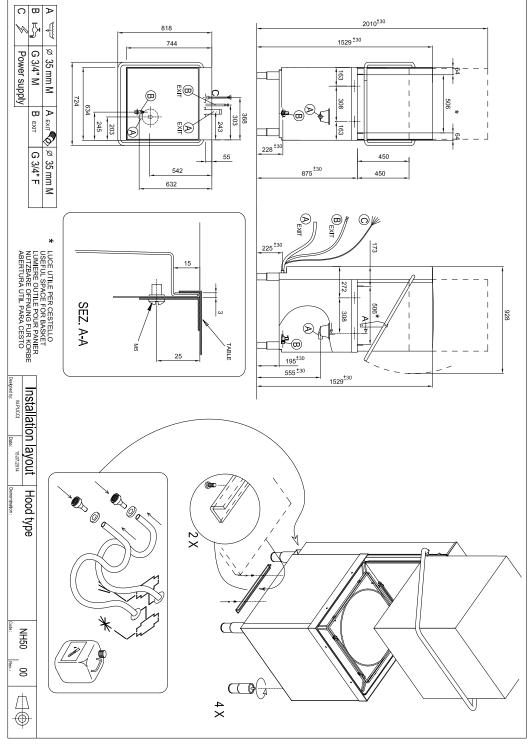



Product benefits

Hood type dishwasher single skin with drain pump controls on TOP 50x50 - 400 V		
Model	SAP Code	00011316
QQI 102 P/TOP	A group of articles - web	Undercounter, continuous and black ware dishwasher

Stainless steel outer shell construction

round construction with stainless steel, rounded edges, partially pressed tub

- easy cleaning, high hygiene standard, long service life
- Washing arms with a component, common for washing and rinsing

washing arms made of composite material common arm for washing and rinsing integrated screw secured against falling out

- easy and safe handling during cleaning; higher user comfort
- LED Display three-line display

diode strip

- easy control of the dishwasher operation
- continuous information on the status of the wash cycle
- diagnostics in the event of a fault
- Double pump

unique two-way DuoFlow pump

- distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump
- Molded basket supports

guide rails for the baskets molded from the body of the dishwasher

- high hygiene standard
- longer service life
- **Detergent dispensers**

two detergent and rinse aid dispensers

 precise chemical dosing by ProDose - precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel Double filter system

the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency

- higher washing efficiency; longer life of the washing bath
- Energy saving

energy saving energy saving system due to lowering the temperature of the boiler

cost saving



Technical parameters

Hood type dishwasher single skin	with drain pump co	ontrols on TOP 50x50 - 400 V
Model	SAP Code	00011316
QQI 102 P/TOP	A group of articles - web	Undercounter, continuous and black ware dishwasher
1. SAP Code: 00011316		15. Number of programs:
2. Net Width [mm]: 634		16. Opening of device: Flip up
3. Net Depth [mm]: 744		17. Door clear height [mm]: 450
4. Net Height [mm]: 1530		18. Inlet pressure [bar]:
5. Net Weight [kg]: 111.00		19. Adjustable feet: Yes
6. Gross Width [mm]:		20. Number of skin:
7. Gross depth [mm]: 868		21. Self-cleaning cycle: Yes
8. Gross Height [mm]: 1579		22. Boiler capacity [l]: 6.00
9. Gross Weight [kg]: 121.00		23. Boiler power [kW]: 8.000
10. Device type: Electric unit		24. Basin volume [l]:
11. Control type: Digital		25. Tank power [kW]: 2.100
12. Material: AISI 304		26. Number of arms for both rinsing and washing:
13. Power electric [kW]: 8.500		27. Arm connection: Hand loosen/tighten screw
14. Loading:		28. Washing arm type:

400 V / 3N - 50 Hz

Rotatable two-pronged



Technical parameters

Hood type dishwasher single	e skin with drain pump conti	rols on TOP 50x50 - 400 V
Model	SAP Code	00011316
QQI 102 P/TOP	A group of articles - web	Undercounter, continuous and black ware dishwasher
29. Washing arm material: Composite		42. Display type: 3 local display + diode bar
30. Rinsing arm type: Rotating two-pronged		43. Location of control panel: On the top
31. Rinsing arm material: Composite		44. USB port: Yes, for Firmware actualisation
32. Deep drawn tank: Yes		45. Drain pump: Yes
33. Tank surface strainers: composite		46. Self-diagnostics: Yes
34. Drain filter: ArchiMedes - double filtration ensures only 18% loss of clea	9	47. Wash pump type: two-way - DuoFlow
35. Thermostop: Yes		48. Detergent dispenser: Yes
36. Boiler thermostat adjust: Yes		49. Rinse aid dispenser: Yes
37. Rack feed capacity: 24-30-60		50. Water consumption of the washing cycle [l/basket]: 2,1
38. Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump		51. Washing cycle time [s/basket]: 60-120-150
39. Energy Saving system: EnergySaving - Energy saving system due to lowering the boiler temperature		52. Rinse water temperature [°C]: 80
40. Hot water electric valve: Yes		53. Standard equipment for device: 1x glass basket, 1x plate basket, 1x cutlery basket
41. Rack size [mm]:		54. Program ProSpeed:

Yes

500 x 500



Technical parameters

Hood type dishwasher single skin with drain pump controls on TOP 50x50 - 400 V		
Model	SAP Code	00011316
QQI 102 P/TOP	A group of articles - web	Undercounter, continuous and black ware dishwasher
55. Program ProFessional: Yes		60. Noise of device: 60,4
56. Program ProTemp: Yes		61. Cross-section of conductors CU [mm²]: 1,5
57. Program ProClean: Yes		62. Water supply connection: 3/4"
58. Program ProDrain: Yes		63. Diameter nominal: DN 50

59. Program ProLong:

Yes