Technical data sheet

Product features

Boiling kettle electric indirect autoclave 150 l 400 V / 3N		
Model	**SAP Code**	00015047
BIA 90/150 E	**A group of articles - web**	Boiling kettles



- Device type: Electric unit
- Device heating type: Indirect
- Steam pressure regulation: Mechanical - the valve releases steam at high pressure
- Filling : Mechanical cock
- Jacket filling: Semi-automatic
- Drain valve diameter: 2”
- Usable volume [l]: 150

SAP Code	00015047	**Power electric [kW]**	21.000
Net Width [mm]	800	**Loading**	400 V / 3N - 50 Hz
Net Depth [mm]	900	**Usable volume [l]**	150
Net Height [mm]	900	**Device heating type**	Indirect
Net Weight [kg]	130.00	**Steam pressure regulation**	Mechanical - the valve releases steam at high pressure


RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062

Technical data sheet

Technical drawing

Boiling kettle electric indirect autoclave 150 l 400 V / 3N		
Model	**SAP Code**	00015047
BIA 90/150 E	**A group of articles - web**	Boiling kettles

1 - PŘÍVOD STUDENÉ VODY	5 -VYPOUŠTĚCÍ KOHOUT DUPLIKÁTORU
2 -POJISTNÝ VENTIL + MONOMETR	6- KONTROLNÍ KOHOUT HLADINY DUPLIKÁTORU
3 -PŘÍVOD ZMĚKČELÉ VODY	7 -VYPOUŠTĚCÍ KOHOUT DUPLIKÁTORU
4 -PŘÍVOD NAPĚTÍ 400V	8-NAPOUŠTĚCÍ BATERIE

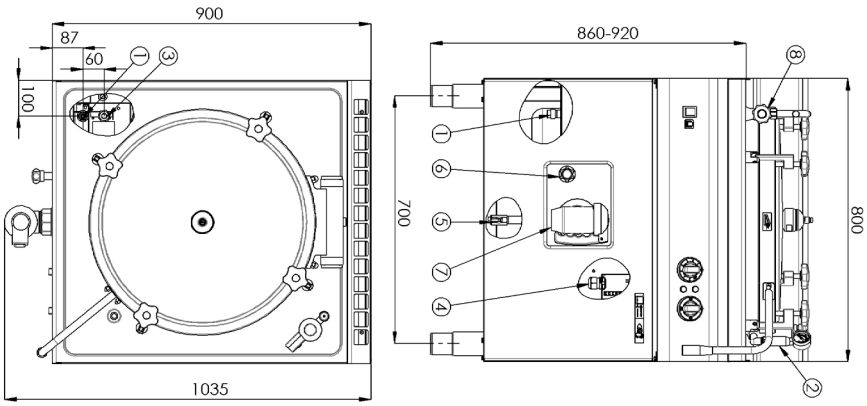

RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062

Technical data sheet

Technical parameters

Boiling kettle electric indirect autoclave 150 l 400 V / 3N		
Model	**SAP Code**	00015047
BIA 90/150 E	**A group of articles - web**	Boiling kettles

1. **SAP Code:**
   00015047
2. **Net Width [mm]:**
   800
3. **Net Depth [mm]:**
   900
4. **Net Height [mm]:**
   900
5. **Net Weight [kg]:**
   130.00
6. **Gross Width [mm]:**
   840
7. **Gross depth [mm]:**
   970
8. **Gross Height [mm]:**
   1160
9. **Gross Weight [kg]:**
   153.00
10. **Device type:**
    Electric unit
11. **Construction type of device:**
    Stationary
12. **Power electric [kW]:**
    21.000
13. **Loading:**
    400 V / 3N - 50 Hz
14. **Protection of controls:**
    IPX4
15. **Material:**
    AISI 304 top plate, AISI 430 cladding
16. **Indicators:**
    operation and warm-up
17. **Drain valve diameter:**
    2"
18. **Worktop type:**
    Molded - comfortable cleaning maintenance
19. **Worktop material:**
    AISI 304
20. **Worktop Thickness [mm]:**
    1.50
21. **Device heating type:**
    Indirect
22. **Volume capacity of the container [l]:**
    150.00
23. **Maximum device temperature [°C]:**
    90
24. **Minimum device temperature [°C]:**
    30
25. **Safety thermostat:**
    Yes
26. **Safety thermostat up to x ° C:**
    150
27. **Adjustable feet:**
    Yes
28. **Bottom material:**
    AISI 316

RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062

Technical data sheet

Technical parameters

Boiling kettle electric indirect autoclave 150 l 400 V / 3N		
Model	**SAP Code**	00015047
BIA 90/150 E	**A group of articles - web**	Boiling kettles

29. Usable volume [l]:
150

30. Filling :
Mechanical cock

31. Jacket filling:
Semi-automatic

32. Steam pressure regulation:
Mechanical - the valve releases steam at high pressure

33. Type of drain valve:
conical

34. Manometer:
Yes

35. Cross-section of conductors CU [mm²]:
10

36. Water supply connection:
1/2”

RM GASTRO, s.r.o.,
Třída Čs. armády 816,
391 81 Veselí nad Lužnicí 1, ID:49825062